


DIFFERENT RAINFOREST OPTIONS:



Direct light Diffused light

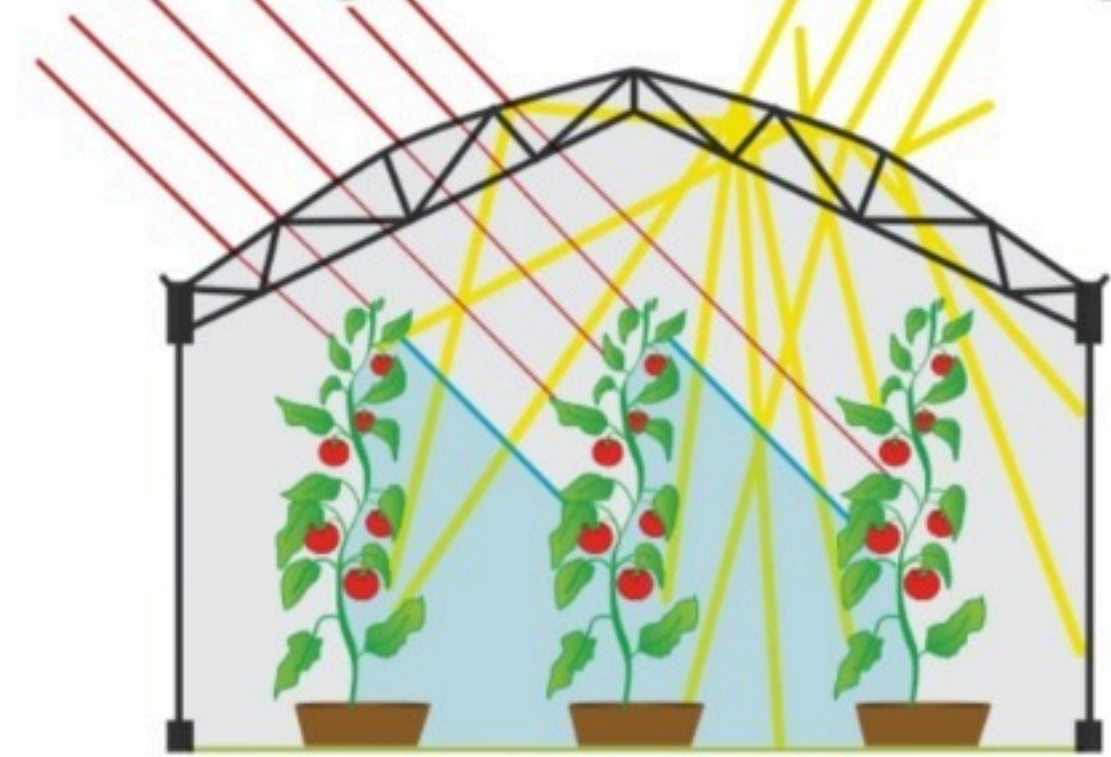

Thermal Effect

Parameters	Units	Specifications
Size	Inches	106"(+/-0.5) Or 112" (+/-1.0)
Colour		Natural See through
GSM Fabric	Gm/Sq.mtr	170(+/-5) Min & 240(+/-5) Reinforcement
Thickness	Micron	160 min-220 max
Rainforcement	cm	20CM
UV Stability	%	4% treated (84% Retention after 1000hr Exposure)
Eyelets	Visual	Std Alluminium, As per requirement
Rope	Visual	4mm, As per requirement
Transparency	%	85% (Average)
Tenlle Strenght		
Wrap	kgf	350(+/-20) for 100mm Specimen
Weft	kgf	350(+/-20) for 100mm Specimen
Tear Strenght		
Wrap	Kgf	35(+/-5) for 75mm specimen
Weft	Kgf	35(+/-5) for 75mm specimen
Elongation	%	25%(+/-5)



SHIVRAJ PLASTIC
NAZARA TAL. SANGOLA
DIST. SOLAPUR (MH) 413307

Website: www.shivrajplastic.com

Prop: Atish Rajput Mo: 9021084054, Ankush Rajput Mo: 9404167564
Rajendra Rajput Mo: 7272006009, Sachin Shinde Mo: 8668410508

Authorised distributor/dealer